

myRobot[®] C E N T E R

Der Spezialist für Roboter in deinem Zuhause

Mit einem Klick zum Online-Shop



myRobotcenter.at



myRobotcenter.de



myRobotcenter.ch



myRobotcenter





Initial Steps

EN

Taking the Gateway into use

Connect the Gateway with the provided power supply unit. During the self-test the Power-LED turns green for about 10 seconds, then starts flashing. Wait until the LED stays green. This can take about 1 min. After this you can connect the Gateway with the internet, using one of the following options:

Cable (LAN) connection

After connecting the Gateway with the provided network cable to your router, the software on the Gateway will be updated automatically. This can take a few minutes. The internet-LED can be flashing red and the Power-LED yellow during this time. In the mean while you could install the GARDENA Smart Systems App from the app-store. Once the Internet-LED and the Power-LED stay green, your Gateway is up to date and you can connect the Gateway to your App by following the instructions in the App.

WLAN connection


The Gateway automatically provides a hotspot network if it is not connected to the internet yet. Once the Internet-LED turns and stays yellow, the hotspot will be visible in your WLAN device. You can connect to it and use the last eight digits of the Gateway ID as password (See picture 1). The Gateway ID is on the label on the back of the Gateway. Using a browser, navigate to URL: <http://10.0.0.1> You should now see the Gateway Configuration Screen in your browser. Use the first 8 digits of the Gateway ID as password (See picture 1).

Please note: this hotspot network does not provide an internet access and therefore some devices automatically ignore and leave this network if other networks are available. In this case you have to disable this option on your device. Please activate Java-script and browser cookies in order to display the page correctly.


In the selection list "Wireless Network" you can select your home network to connect your Gateway with the internet. Enter your Router or Network password and confirm these settings to save. Wait until your Gateway connects and the Internet-LED turn green. This can take a few minutes.

The software of your Gateway will now be updated. During this time the Power-LED may flash yellow. In the mean while you could install the GARDENA Smart Systems App from the app-store. Once the Internet-LED and the Power-LED stay green, your Gateway is up to date and you can connect the Gateway to your App by following the instructions in the App.

Picture 1:

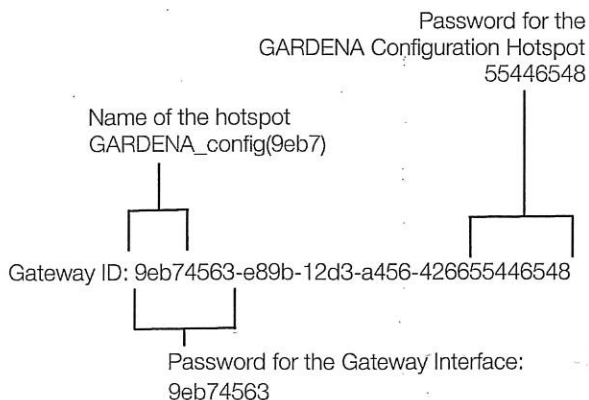

LED Description:



Erste Schritte

D

Inbetriebnahme smart Gateway

Verbinden Sie das Gateway über das mitgelieferte Netzteil mit dem Stromnetz. Im Selbsttest leuchtet die Power-LED für ca. 10 Sekunden grün, bis sie anfängt zu blinken. Warten Sie, bis die Power-LED dauerhaft grün leuchtet. Dieser Vorgang kann ca. eine Minute dauern. Erst dann kann das Gateway mit dem Internet verbunden werden. Wählen Sie eine der folgenden Optionen:

Verbinden mittels Kabel

Verbinden Sie das Gateway über das mitgelieferte Ethernetkabel mit ihrem Router. Die Software Ihres Gateways wird nun auf den neusten Stand gebracht. Diesen Vorgang kann mehrere Minuten dauern. Die Internet-LED kann währenddessen rot und die Power-LED gelb blinken. Wir empfehlen in der Zwischenzeit die GARDENA smart system App im Apple AppStore oder im Google Play Store zu laden. Sobald die Internet-LED und die Power-LED dauerhaft grün leuchten, wurde das Gateway erfolgreich aktualisiert. Nun kann das Gateway eingebunden werden. Befolgen Sie dazu die Anweisungen in der App.

Verbinden mittels WLAN

Das Gateway stellt automatisch ein GARDENA Konfigurations-Netz bereit, weil das Gateway noch keine Verbindung zum Internet hat. Sobald die Internet-LED dauerhaft gelb leuchtet, ist das Konfigurations-Netz erreichbar. Wie ein Netzname aussehen kann, wird in Bild 1 beschrieben.


Stellen Sie nun eine Verbindung mit dem GARDENA Konfigurations-Netz her. Verwenden Sie die letzten acht Zeichen Ihrer Gateway ID als Passwort (erklärt in Bild 1). Die Gateway ID ist auf dem Aufkleber, unterhalb des Gerätes ersichtlich. Navigieren Sie zur folgenden URL: <http://10.0.0.1> in ihrem bevorzugtem Internet-Browser. Sie befinden sich nun im Gateway Interface. Melden Sie sich mit den ersten acht Zeichen Ihrer Gateway ID als Passwort an (siehe dazu Bild 1).

Achtung: Dieses Netz verfügt nicht über einen eigenen Internetzugang. Deshalb kann es vorkommen, dass Ihr Gerät automatisch das GARDENA Konfigurations-Netz wieder verlässt. In diesem Fall müssen Sie die entsprechende Option auf ihrem Gerät deaktivieren. Beachten Sie, dass Ihr Browser Cookies und JavaScript aktiviert haben muss, sonst kann die Seite nicht dargestellt werden.

Unter 'WLAN', wählen Sie Ihr Netz aus. Darüber verbinden Sie das Gateway mit dem Internet. Geben Sie das Passwort Ihres Netzes ein und bestätigen Sie Ihre Einstellung. Warten Sie, bis die Internet-LED dauerhaft grün leuchtet. Dieser Vorgang kann bis zu mehreren Minuten dauern.

Die Software Ihres Gateways wird nun auf den neusten Stand gebracht. Dieser Vorgang kann mehrere Minuten dauern. Die Power-LED kann währenddessen gelb blinken. Wir empfehlen in der Zwischenzeit die GARDENA smart system App im Apple AppStore oder im Google Play Store zu laden. Sobald die Internet-LED und die Power-LED dauerhaft grün leuchten, wurde das Gateway erfolgreich aktualisiert. Nun kann das Gateway eingebunden werden. Befolgen Sie dazu die Anweisungen in der App.

Bild 1



LED-Beschreibung

